



Hydraulic Pumps and Motors Catalogue

CAT.ASEAN_HYG_PAM_ASMR_MAY2017 (REV.1)

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ENGINEERING YOUR SUCCESS.

Parker Hannifin Corporation

Parker can be found on and around everything that move. We manufacture highly engineered components and systems that facilitate motion and the controlled flow of liquids and gasses for a wide variety of global markets to increase our customers' productivity and profitability.

From flying aircraft and building infrastructure; to developing more efficient energy, advancing medical science and engineered materials, providing clean food and water, and supporting military efforts.

Parker's 55,000 employees bring it all together, partnering with our customers to help solve some of the world's greatest engineering challenges.



Solving The World's Greatest Engineering

Our focus on solving some of the world's greatest engineering challenges sparks our passion for innovation and secures our future growth.

The development of more efficient energy sources; the desire to produce and distribute clean water; new drug discovery and medical advances; the building of infrastructure and transportation to support a growing population; the safe cultivation, transportation and preservation of food sources; emerging developments in defense; and the protection of our environment – all of these challenges drive Parker people forward, seeking new ways to innovate, combine technologies, collaborate, develop systems and partner with our customers to solve problems.

Partnership in Motion From hidden costs to visible profits

Partnership is an important aspect of the Parker Hannifin business philosophy. We feel that together we can increase your productivity and profitability by utilizing all the products, services and systems in our portfolio.

Whether your needs is to develop sophisticated new machinery or to keep production lines running 24 hours a day, Parker is there to work with you to help you achieve your goals.

History

The history of our great company is an interesting account of the transformation of technology over a period of nearly 100 years.

Founded in 1918, the evolution of the Parker Appliance Company into Parker Hannifin Corporation illustrates a legacy of innovation.

We believe our future growth is assured by honoring Parker's tradition of excellence and fair dealings.

1918	Founded
822,000	Products Sold
58,151	Customers
13,000	Distribution/MRO Outlets
1,200	Markets
316	Manufacturing Plants
50	Countries

Parker Hannifin ASEAN & Australasia



ASEAN Sales Office Presence

- SINGAPORE (Head Office)
- MALAYSIA: Kuala Lumpur, Penang, Johor Bahru
- INDONESIA: Jakarta
- THAILAND: Bangkok
- VIETNAM: Ho Chi Minh City
- PHILIPPINES: Manila

Australasia Sales Office Presence

- SYDNEY (Head Office)
- AUSTRALIA: Perth, Melbourne, Brisbane, Adelaide, Mackay, Newcastle
- NEW ZEALAND: Auckland



Table of Content

1/ Fixed Displacement	5
Gear Pumps And Motors	5
Quick View	6
Parker 500 Series	7
Parker 300 Series	20
Parker 600 Series	33
Application Market	43
Literature	44
Vane Pumps	45
SDV Series	46
Single Pumps	49
Double Pumps	54
Triple Pumps	60
Application Market	64
Literature	65
LSHT Torqmotors™ and Nichols™ Motors	66
Specifications	67
TB Series	69
TE Series	71
Small Frame Options	73
TF Series	74
TG Series	76
TH Series	78
Large Frame Options	80
TK Series	82
Competitive Crossover	83
Application Market	84
Literature	85
Axial Piston Pumps and Motors	86
Axial Piston F11 Series	87
Axial Piston F12 Series	90
Application Market	95
Literature	96

Table of Content

2/ Variable Displacement	97
Pumps	98
Quick View	98
PAVC Series	99
PAVC - Application Market/Literature	103
PVP Series	104
PVP - Application Market/Literature	108
P1/PD Series	109
P1/PD - Application Market/Literature	114
P2 Series	117
P2 - Application Market	122
P2 - Literature	123
PV Plus Series	124
PV Plus - Application Market	129
PV Plus - Literature	130
Motors	131
Quick View	131
V12 Bent Piston Series	132
V14 Bent Piston Series	134
Application Market	138
Literature	139
Transmission	140
Hydrostatic Pumps Goldcup Series	141
Hydrostatic Motors Goldcup Series	147
Application Market	149
Literature	150
3/Truck Pumps	151
Quick View	152
GPA/GP1 Series	153
F1 Pumps	158
F1 Motors	162
F2 Twin-flow Pumps	164
VP1 Pumps	167
Suction Fittings	176
Application Market	178
Literature	179
4/Appendix	180
Sizing	180
Useful Formula	181
Flow Capacity Chart	182
SAE Flanges and Shafts	183
4-Bolt SAE Ports Sizes	184



Gear Pumps and Motors

1/ Fixed Displacement



ENGINEERING YOUR SUCCESS.

Series 2HX Electrohydraulic Actuators

Cylinder Accessories

	Female Rod Clevis Part Number																		
	51221†	50940	50941	50942	133284	50943	50944	133285	50945	133286	50946	50947	50948	50949	50950	50951	50952	50953	50954
A	1 ³ / ₁₆	3/4	3/4	1 1/8	1 1/8	1 5/8	1 5/8	1 5/8	1 7/8	2	2 1/4	3	3	3 1/2	3 1/2	3 1/2	3 1/2††	4††	4††
CB	1 1/32	3/4	3/4	1 1/4	1 1/4	1 1/2	1 1/2	1 1/2	2	2	2 1/2	2 1/2	2 1/2	3	3	3	4	4 1/2	4 1/2
CD	5/16	1/2	1/2	3/4	3/4	1	1	1	1 3/8	1 3/8	1 3/4	2	2	2 1/2	3	3	3 1/2	4	4
CE	2 1/4	1 1/2	1 1/2	2 1/8	2 3/8	2 15/16	2 15/16	3 1/8	3 3/4	4 1/8	4 1/2	5 1/2	5 1/2	6 1/2	6 3/4	6 3/4	7 3/4	8 13/16	8 13/16
CW	1 3/64	1/2	1/2	5/8	5/8	3/4	3/4	3/4	1	1	1 1/4	1 1/4	1 1/4	1 1/2	1 1/2	1 1/2	2	2 1/4	2 1/4
ER	1 9/64	1/2	1/2	3/4	3/4	1	1	1	1 3/8	1 3/8	1 3/4	2	2	2 1/2	2 3/4	2 3/4	3 1/2	4	4
KK	5/16-24	7/16-20	1/2-20	3/4-16	3/4-16	7/8-14	1-14	1-14	1 1/4-12	1 1/4-12	1 1/2-12	1 3/4-12	1 7/8-12	2 1/4-12	2 1/2-12	2 3/4-12	3 1/4-12	3 1/2-12	4-12
Load Capacity Lbs. Ⓞ	2600	4250	4900	11200	11200	18800	19500	19500	33500	33500	45600	65600	65600	98200	98200	98200	156700	193200	221200

	Knuckle Part Number																
	74075	69089	69090	69091	69092	69093	69094	69095	69096	69097	69098	69099	69100	73536	73437	73438	73439
A	3/4	3/4	3/4	1 1/8	1 1/8	1 5/8	2	2 1/4	2 1/4	3	3 1/2	3 1/2	3 5/8	4 1/2	5	5 1/2	5 1/2
CA	1 1/2	1 1/2	1 1/2	2 1/16	2 3/8	2 13/16	3 7/16	4	4 3/8	5	5 13/16	6 1/8	6 1/2	7 5/8	7 5/8	9 1/8	9 1/8
CB	7/16	3/4	3/4	1 1/4	1 1/2	1 1/2	2	2 1/2	2 1/2	2 1/2	3	3	3 1/2	4	4	4 1/2	5
CD	7/16	1/2	1/2	3/4	1	1	1 3/8	1 3/4	2	2	2 1/2	3	3	3 1/2	3 1/2	4	4
ER	1 9/32	2 3/32	2 3/32	1 1/16	1 7/16	1 7/16	1 31/32	2 1/2	2 27/32	2 27/32	3 9/16	4 1/4	4 1/4	4 31/32	4 31/32	5 11/16	5 11/16
KK	5/16-24	7/16-20	1/2-20	3/4-16	7/8-14	1-14	1 1/4-12	1 1/2-12	1 3/4-12	1 7/8-12	2 1/4-12	2 1/2-12	2 3/4-12	3 1/4-12	3 1/2-12	4-12	4 1/2-12
Load Capacity Lbs. Ⓞ	3300	5000	5700	12100	13000	21700	33500	45000	53500	75000	98700	110000	123300	161300	217300	273800	308500

	Clevis Bracket for Knuckle Part Number													
	74076	69205	69206	69207	69208	69209	69210	69211	69212	69213	73542	73543	73544	
CB	1 5/32	3/4	1 1/4	1 1/2	2	2 1/2	2 1/2	3	3	3 1/2	4	4 1/2	5	
CD	7/16	1/2	3/4	1	1 3/8	1 3/4	2	2 1/2	3	3	3 1/2	4	4	
CW	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	1 1/2	1 1/2	1 1/2	2	2	2	
DD	1 7/64	1 13/32	1 17/32	2 1/32	2 1/32	2 29/32	3 1/16	3 1/16	3 15/16	4 1/16	4 13/16	5 1/16	5 2 1/16	
E	2 1/4	3 1/2	5	6 1/2	7 1/2	9 1/2	12 3/4	12 3/4	12 3/4	12 3/4	15 1/2	17 1/2	17 1/2	
F	3/8	1/2	5/8	3/4	7/8	7/8	1	1	1	1	1 11/16	1 15/16	1 15/16	
FL	1	1 1/2	1 7/8	2 1/4	3	3 5/8	4 1/4	4 1/2	6	6	6 11/16	7 11/16	7 11/16	
LR	5/8	3/4	1 3/16	1 1/2	2	2 3/4	3 3/16	3 1/2	4 1/4	4 1/4	5	5 3/4	5 3/4	
M	3/8	1/2	3/4	1	1 3/8	1 3/4	2 1/4	2 1/2	3	3	3 1/2	4	4	
MR	1/2	5/8	2 9/32	1 1/4	1 21/32	2 7/32	2 25/32	3 1/8	3 19/32	3 19/32	4 1/8	4 7/8	4 7/8	
R	1.75	2.55	3.82	4.95	5.73	7.50	9.40	9.40	9.40	9.40	12.00	13.75	13.75	
Load Capacity Lbs. Ⓞ	3600	7300	14000	19200	36900	34000	33000	34900	33800	36900	83500	102600	108400	

	Eye Bracket and Mounting Plate Part Number											
	74077	69195	69196	85361*	69198	85362*	85363*	85364*	85365*	73538	73539	
CB	5/16	3/4	1 1/4	1 1/2	2	2 1/2	2 1/2	3	3	4	4 1/2	
CD	5/16	1/2	3/4	1	1 3/8	1 3/4	2	2 1/2	3	3 1/2	4	
DD	1 7/64	1 13/32	1 17/32	2 1/32	2 1/32	2 29/32	3 1/16	3 1/16	3 15/16	4 1/16	4 13/16	
E	2 1/4	2 1/2	3 1/2	4 1/2	5	6 1/2	7 1/2	8 1/2	9 1/2	12 5/8	14 7/8	
F	3/8	3/8	5/8	7/8	7/8	1 1/8	1 1/2	1 3/4	2	1 11/16	1 15/16	
FL	1	1 1/8	1 7/8	2 3/8	3	3 3/8	4	4 3/4	5 1/4	5 11/16	6 7/16	
LR	5/8	3/4	1 1/4	1 1/2	2 1/8	2 1/4	2 1/2	3	3 1/4	4	4 1/2	
M	3/8	1/2	3/4	1	1 3/8	1 3/4	2	2 1/2	3	3 1/2	4	
MR	1/2	9/16	7/8	1 1/4	1 5/8	2 1/8	2 7/16	3	3 1/4	4 1/8	5 1/4	
R	1.75	1.63	2.55	3.25	3.82	4.95	5.73	6.58	7.50	9.62	11.45	
Load Capacity Lbs. Ⓞ	1700	4100	10500	20400	21200	49480	70000	94200	121900	57400	75000	

	Pivot Pin Part Number													
	74078	68368	68369	68370	68371	68372	68373	69215	68374	68375	69216	73545	82181	73547
CD	7/16	1/2	3/4	1	1 3/8	1 3/4	2	2	2 1/2	3	3	3 1/2	4	4
CL	1 5/16	1 7/8	2 5/8	3 1/8	4 1/8	5 3/16	5 3/16	5 11/16	6 3/16	6 1/4	6 3/4	8 1/4	8 5/8	9
Shear Capacity Lbs. Ⓞ	6600	8600	19300	34300	65000	105200	137400	137400	214700	309200	309200	420900	565800	565800

*Cylinder accessory dimensions conform to NFPA recommended standard NFPA/T3.6.8 R1-1984, NFPA recommended standard fluid power systems — cylinder — dimensions for accessories for cataloged square head industrial types. Parker adopted this standard in April, 1985. Eye Brackets or Mounting Plates shipped before this date may have different dimensions and will not necessarily interchange with the NFPA standard. For dimensional information on older style Eye Brackets or Mounting Plates consult Drawing #144805 or previous issues of this catalog.

Ⓞ See Accessory Load Capacity note on previous page.

•These sizes supplied with cotter pins.

†Includes Pivot Pin.

Consult appropriate cylinder rod end dimensions for compatibility.

For Cylinder Division Plant Locations – See Page II.



How to Order

Parker Series 2HX cylinders can be completely described by a model number consisting of coded symbols of digits and letters used in a prescribed sequence. To develop a model number, select only those symbols that represent the cylinder required, and place them in the sequence indicated by the example in Table A opposite. The example makes use of all places, although many model numbers will not require them all, as in the case where cushioning, double rod, or special modifications are not required. For additional cylinder specifications and dimensions see Parker Series 2H section.

When a Series 2HX actuator is ordered the following information must be developed.

- 1) The basic actuator model number including 2HX under Series as shown in Table A opposite.
- 2) If a rod extension is required, specify rod end thread Style 3.
- 3) A six digit code describing the valve and feedback type if any, and the supplier (Parker or customer).
- 4) If an actuator is to accept a D03, D05, D06, D07, or D08 pattern valve no additional information is necessary. If an actuator is to accept a servo valve or include any valve furnished by Parker, a manufacturer and model number should be supplied below the five digit code.
- 5) If a cylinder is to include a feedback device the following information must be called out below the six digit code:

Linear Displacement Transducer (LDT)

Analog Position

- 1) Position Output Signal and connection type (RB, RO)
- 2) Electrical Cable Length (from probe if integral cable)
- 3) Cable Length to AOM (if AOM specified)

Analog Position and Velocity

- 1) Position Output Signal
- 2) Velocity Output Signal and maximum piston velocity for calibration in inches per second
- 3) Electrical Cable Length to AOM

Digital Position

- 1) Specify Pulse Duration Output only (Specify Internal or External Interrogation and the number of circulations)
- 2) Data Ready Line
- 3) Update Time

Linear Potentiometer (LRT)

- 1) Electrical connector position 1-4 cap end
- 2) Gross and net stroke if 1.75" rod dia. or smaller

Other Feedback Device

- 1) Device Type, Manufacturer, and Model Number
- 2) Output Signal

Integral Manifold Option

The integral manifold option is only available with the Parker Series 2HX 2" through 5" bores. All integral manifolds are available at the cap end position #1 only. For special integral manifolds for Parker Series 3LX and 3HX — consult factory.

Bolt-On Manifold Option

The bolt-on manifold option is available with Parker Series 2HX, 3LX and 3HX. Manifolds may be located on either the head or cap end at any position that does not interfere with mounting. For manifolds available by bore size, see the dimensions section of the catalog.

Feedback Option

Parker Series 2HX, 3LX, and 3HX actuators may be ordered prepared for a feedback device or prepared for and supplied with a feedback device. The Parker LRT option may only be ordered installed at the factory. See the ordering code on the opposite page. Parker's standard LDT option is a Temposonics™ LH position sensor. To specify another manufacturer's magneto-restrictive position sensor place an "S" in the cylinder model code and specify the manufacturer's name and model number. Parker will install any other type and brand of feedback specified by the customer as long as it is reasonably designed to fit into an NFPA type cylinder — consult factory.

WARNING

Failure or improper selection or improper use of the products and/or systems described herein or related items can cause death, personal injury and property damage.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

For additional information – call your local Parker Cylinder Distributor.

Series 2HX Electrohydraulic Actuators

How to Order Valve and Feedback Codes

2HX Series Model Codes

The Parker 2HX Series model code is based on the standard Parker 2H Series model code system. The common modifications available for the Parker 2H are available with the Parker 2HX configuration as long as the modifications do not interfere with the Valve and Feedback options selected. The Bolt-On Manifold and Feedback options described in this

catalog and outlined below are available with the Parker 3L Series medium-duty hydraulic cylinder and with the Parker 3H Series (7" and 8" bore) heavy-duty hydraulic cylinder. Specify "3LX" and "3HX" respectively in the model code described below. Integral manifolds are **not** available as standard for the 3LX and 3HX.

Table A — Basic Model Numbers

Bore Size	Cushion Head End	Double Rod	Mounting Style	Mounting Modification	Series	Piston	Ports	Common Modifications	Special Modifications	Piston Rod Number	Rod End Thread Style	Thread Type	Cushion Cap End	Stroke
4.00	C	—	TC	P	2HX	L	T	V*	S	1	4	A	—	X24.00
Specify. Consult dimension tables for available bore sizes. Also see Parker Series 2H.	Specify only if cushion Head End is required.	Consult factory for double rod cylinders.	Specify Mounting Style. Consult dimension tables for available mounting styles. Also see Parker Series 2H.	Specify P- for thrust key mounting. *ONLY IF REQUIRED.	Specify Series 2HX for 2"-6" bores, 3HX for 7" and 8" bores, 3LX for medium-duty 2" - 6" bores.	Use L for Lipseal Piston. Use K for Hi-Load Piston. Use C for ring type piston.	Specify "T" for SAE straight thread ports. (all manifolds) Optional ports available without manifolds (see 2H).	If required specify V = Viton Seals E = EPR Seals. Consult Section C, page 83 for fluid compatibility information.	Specify an "S" for all special modifications not called out in the six digit code below.	Specify rod code number. Consult dimension tables for available rod diameters and section C, page 96 for rod buckling considerations.	Specify Style 4, Small Male, Style 8, Intermediate Male, Style 3, Special. Specify KK, A, LA or W dimension required.	Specify A = UNF W = BSF M = Metric	Cap End Cushions are not available with LDT or LRT feedback. Specify C for cap cushion with no feedback.	Specify in inches. Show symbol "x" just ahead of stroke length.

**Table B — Valve and Feedback Codes
(Required for 2HX Ordering)**

Valve Manifold	Valve Pattern Group	Valve Location	Feedback Option	Feedback Furnished	Feedback Protective Enclosures
N = None B = Bolt-On* I = Integral**	N = Not applicable A = Servo Group A†† D = Servo Group D†† G = D03 (Group G) H = D05 (Group H) J = D06 (Group J)† K = D07 (Group K)† M = D08 (Group M)† X = Other*** (Please Specify)***	N = Not Applicable H = Head C = Cap	N = None C = LDT• F = LRT•• X = Other*** (Please specify)*** B = BALLUFF	N = Not Applicable 1 = Prepare to accept 2 = Included	N = Not Applicable A = False Stage D = Light Duty F = Medium Duty

* Bolt-On Manifolds will be located at position #1 unless an "S" is placed in the cylinder model code and the mounting position is indicated. Bolt-On Manifolds may be positioned on either the head or cap end at any location not occupied by a mount or port or cushion.

** Integral Manifolds are only available at cap end position #1.

*** When selecting "other" an "S" must be placed in the model code and the valve or feedback device must be specified by the customer.

† Valve patterns D06 (Group J), D07 (Group K), and D08 (Group M) are *only* available as Bolt-On Manifolds. Consult factory for DD Mounts.

†† See Valve group table on page 154 & 174 for Servo Valve mounting pattern descriptions.

• When an LDT is to be supplied by the customer, Parker prepares the actuator with an SAE port, magnet, and gun drilled to accept a 2.5" dead zone LDT.

•• LRTs can *only* be installed by Parker at the factory. Electrical connector will be at position #4 standard.

Example 1: Actuator with LDT feedback only (2.5" dead band LDT), and 0 to 10 VDC grounded output with 15 foot electrical cable.

2.50" C-2HXT 34 x 12.000"
NNNC2N

- 1) 0 to 10 VDC
- 2) 15 foot electrical cord

Example 2: Actuator to **accept** a BD-30 servo valve and to **include** analog LDT with velocity output, 15 ips max velocity, low friction seals and extra-heavy-duty enclosure. Cushioned head end.

6.0 CC 2HX TS 14 A x 60
BDCC2A

Low friction piston and rod seals
Velocity calibration: +10 VDC = 15 ips extending

For Cylinder Division Plant Locations – See Page II.



B


Parker TS-2000 seal designed to eliminate cylinder rod seal leakage.

Parker Series 2H Heavy Duty and Series 3L Medium Duty Hydraulic Cylinders with the TS-2000 seal offers positive protection against cylinder rod leakage under the most demanding applications.

The TS-2000 seal is the product of countless hours of research, development and extensive field testing and is only available on Parker Cylinders.

Based on the popular Parker Serrated Lipseal rod design, the TS-2000 incorporates the pressure-compensated, uni-directional characteristics of a U-cup with the multiple edge sealing effectiveness of compression-type stacked-packings.

The goal for the Parker team was to design a rod seal suitable for all types of applications, regardless of pressure profile. It had to be composed of a

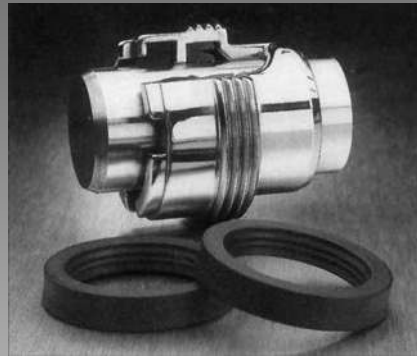

“Jewel” gland with wiperseal and TS-2000 cylinder rod seal.

material that would not react chemically with hydraulic fluids. And it had to produce better and more reliable “dry rod” performance than the standard serrated lip-seal design in a broad range of applications.


The result is the TS-2000 seal, designed especially to eliminate rod seal leakage in the most demanding applications. It features a special polyurethane material that will not react chemically with petroleum-based hydraulic fluid, is extremely resistant to abrasion and extrusion, and provides exceptional service life. It has more sealing edges than other seals on the market, which

in turn produces “dry rod” performance. The seal geometry was refined for maximum stability in the groove and has excellent performance characteristics throughout a broad range of pressures and piston rod velocities.

The Parker design team was successful!

TS-2000 rod seal has not failed in any of the test applications in the lab or on the job, no matter how tough or demanding.

For more information on the TS-2000 call or write your local Parker distributor or Parker Hannifin Corporation, Cylinder Division, 500 S. Wolf Road, Des Plaines, IL 60016, 847-298-2400.

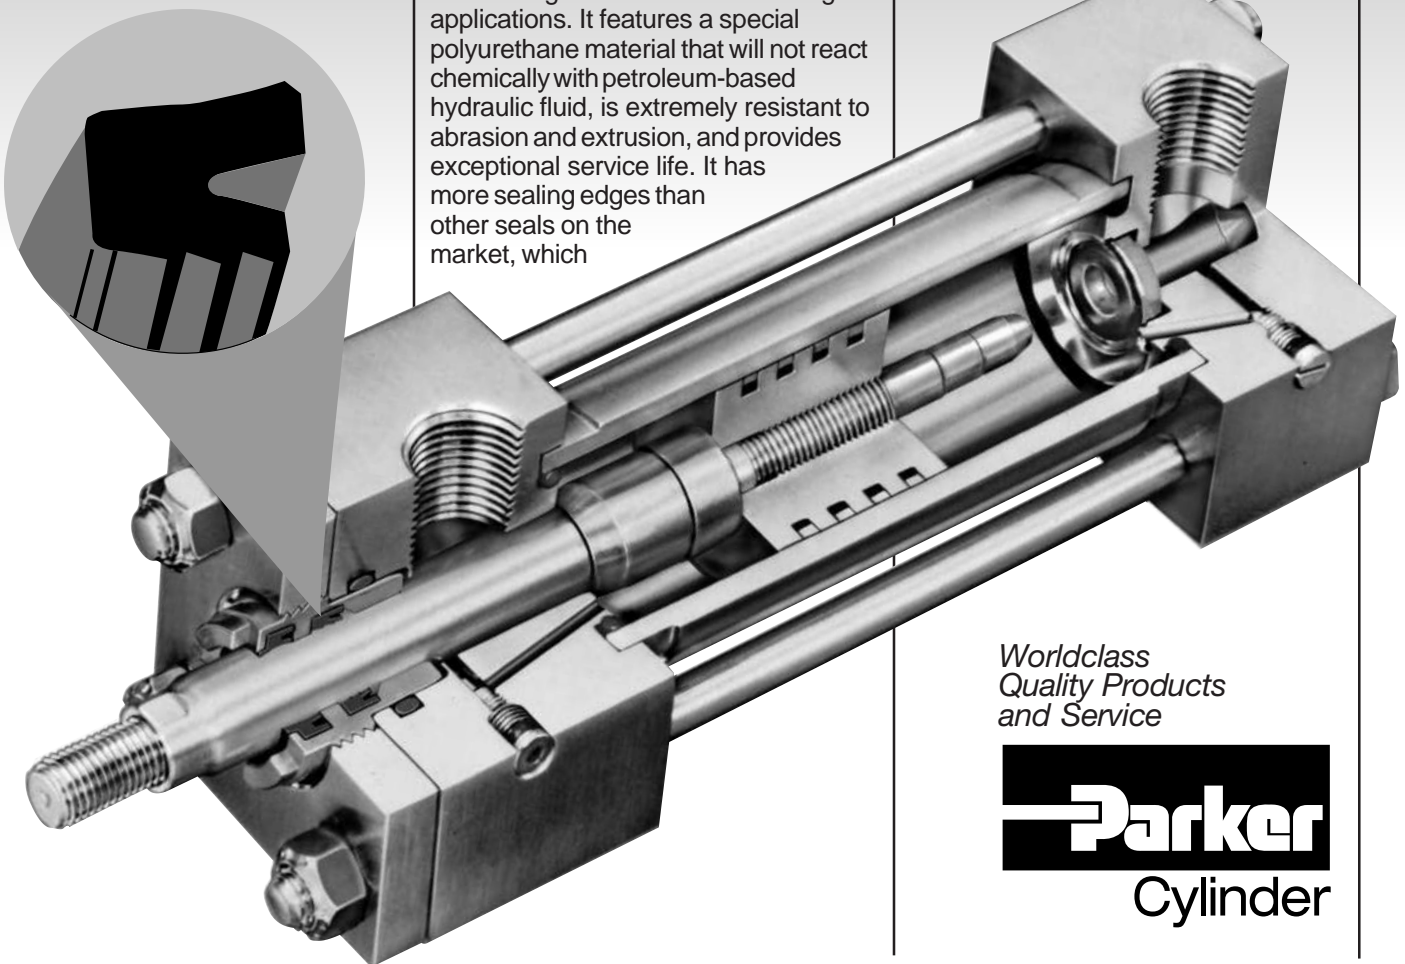

*Worldclass
Quality Products
and Service*

Parker
Cylinder

For additional information – call your local Parker Cylinder Distributor.